

Site Modeling for Tidal Turbines



Kristen Thyng and Jim Riley

Department of Mechanical Engineering,
Northwest National Marine Renewable Energy Center (NNMREC),
University of Washington
thyngkm@uw.edu



Overview

- Tidal hydrokinetic energy is the placement of turbines in strong currents to capture kinetic energy and make clean, renewable energy
- High predictable
- Located in an area with a large population

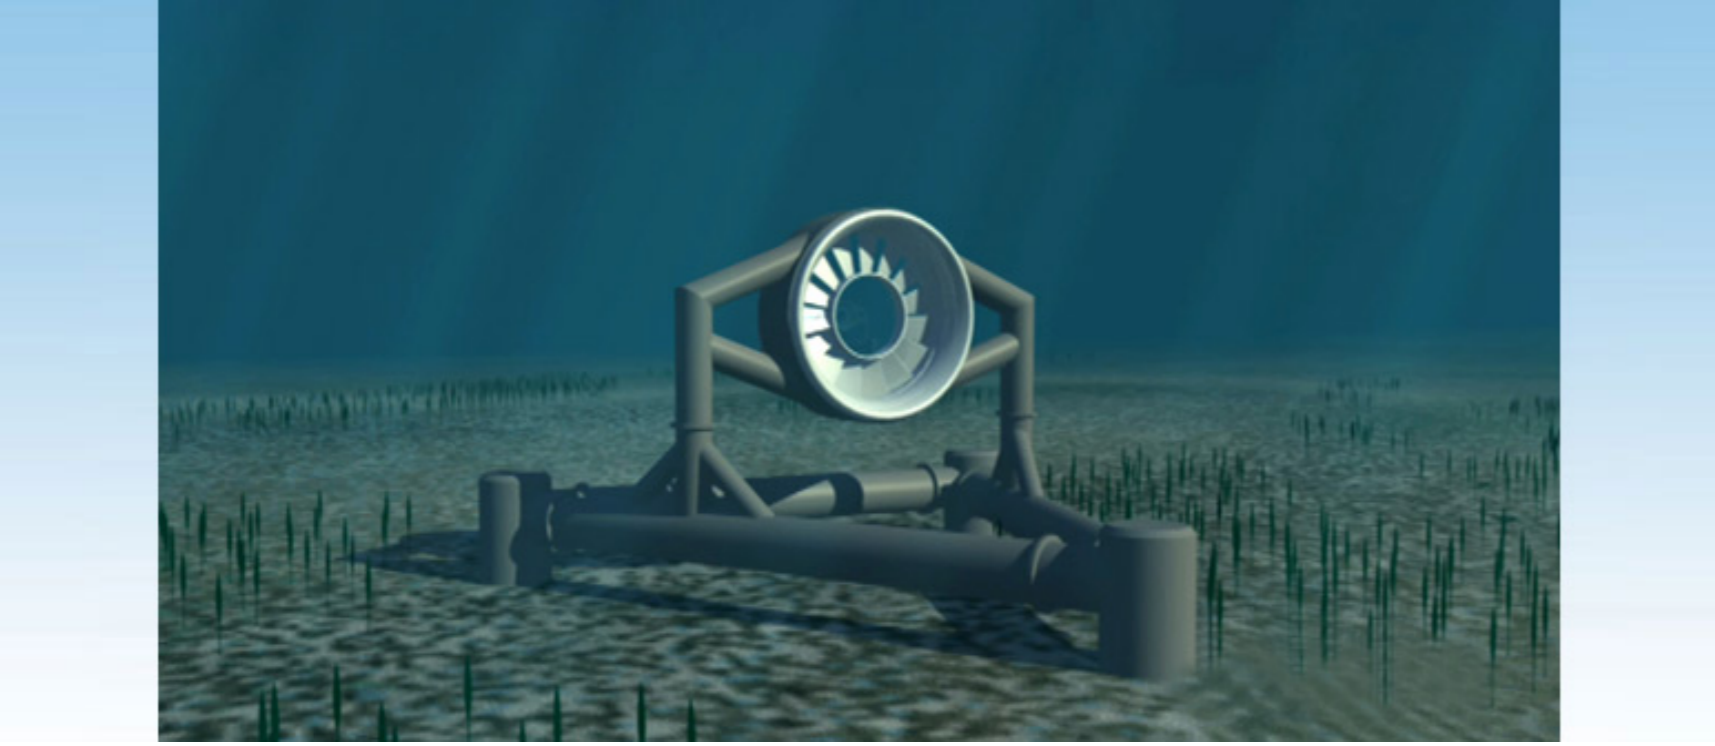


Figure 1: Turbine Design for Pilot Project, Open Hydro [1]

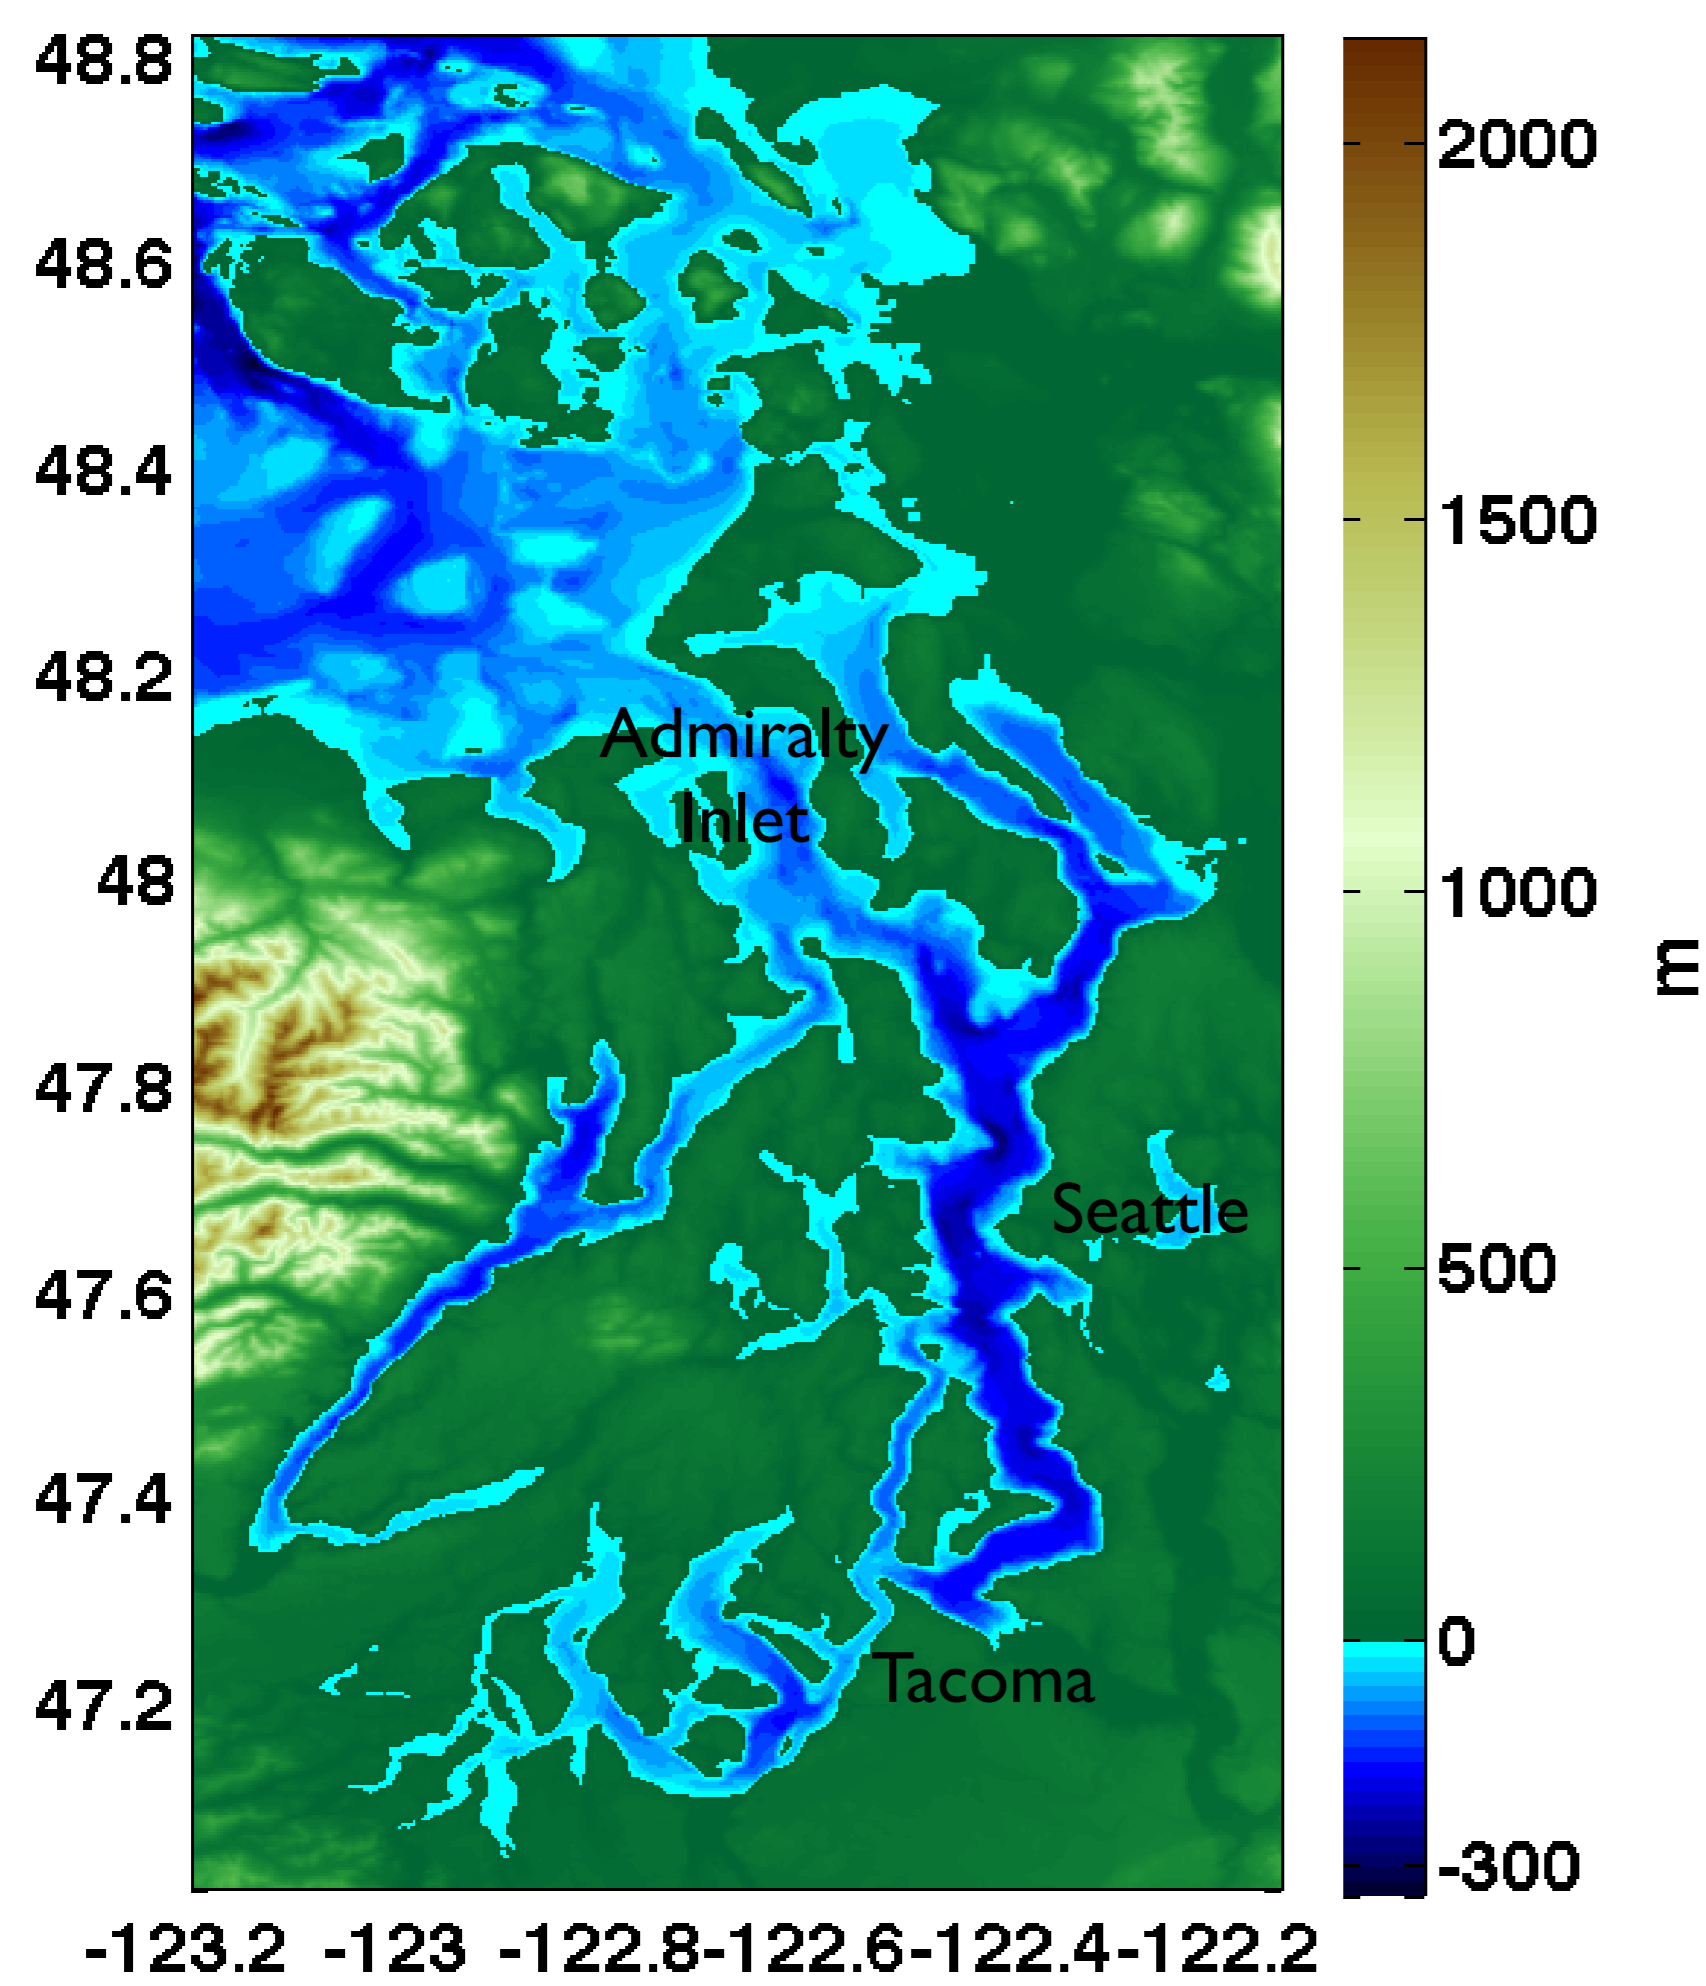


Figure 2: Puget Sound

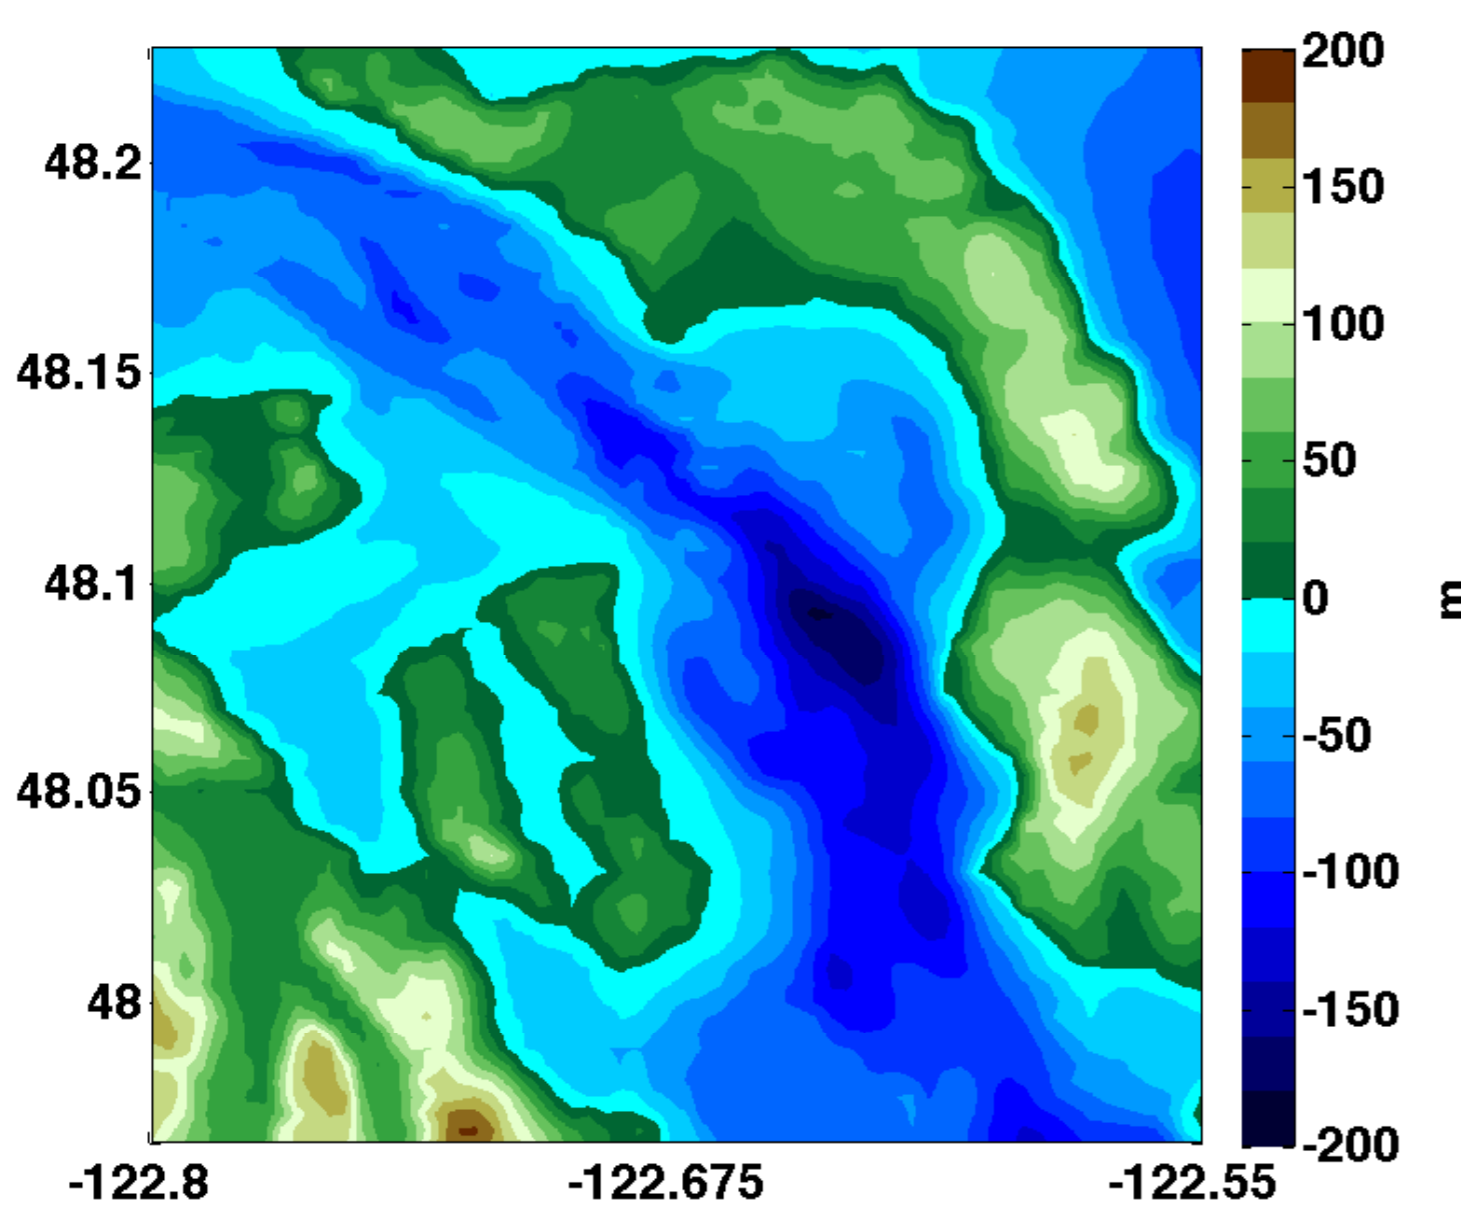


Figure 3: Admiralty Inlet, Tidal Energy Development Area of Interest

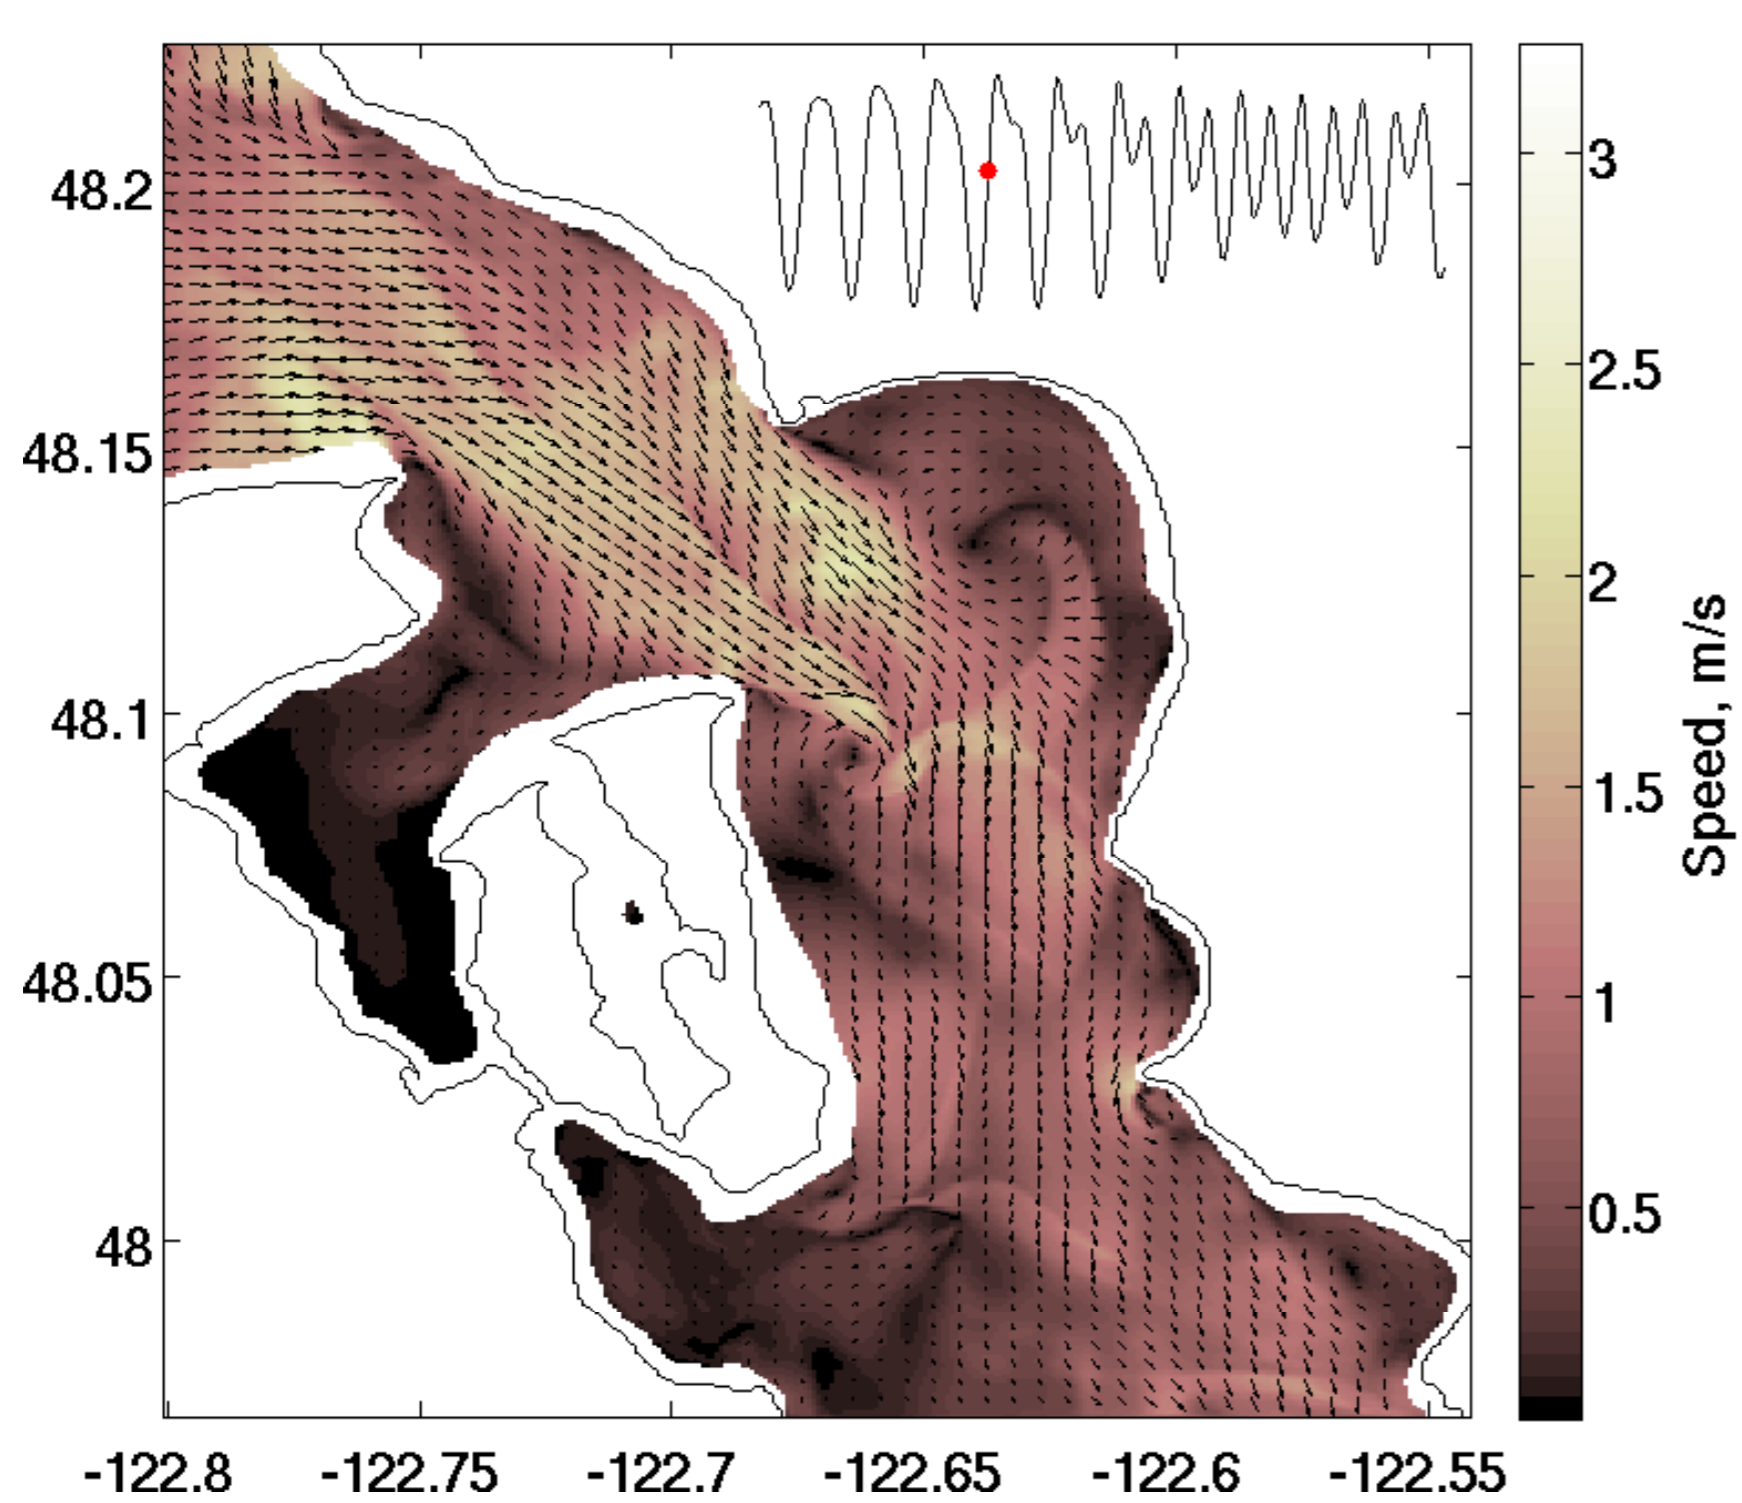


Figure 4: Snapshot of Speed at Peak Flood

Metrics and Results

- Summarize complex flow field information to inform turbine siting
- Building on previous work at the UW [2] [3]
- Look at metrics summarizing:
 - Quantification of resource
 - * Mean speed
 - * Mean kinetic power density
 - * Turbine operation time
 - * Power available given turbine properties
 - Qualification of resource
 - * Bidirectionality
 - * Power bias
 - Turbine survivability and efficiency
 - * Vertical velocity
 - * Shear
 - * Turbulence

⇒ We want to know where these occur and why
⇒ Use a numerical model to help answer these questions

Mean Kinetic Power Density

MKPD = $\frac{1}{2}\rho s^3$, gives a measure of the available resource

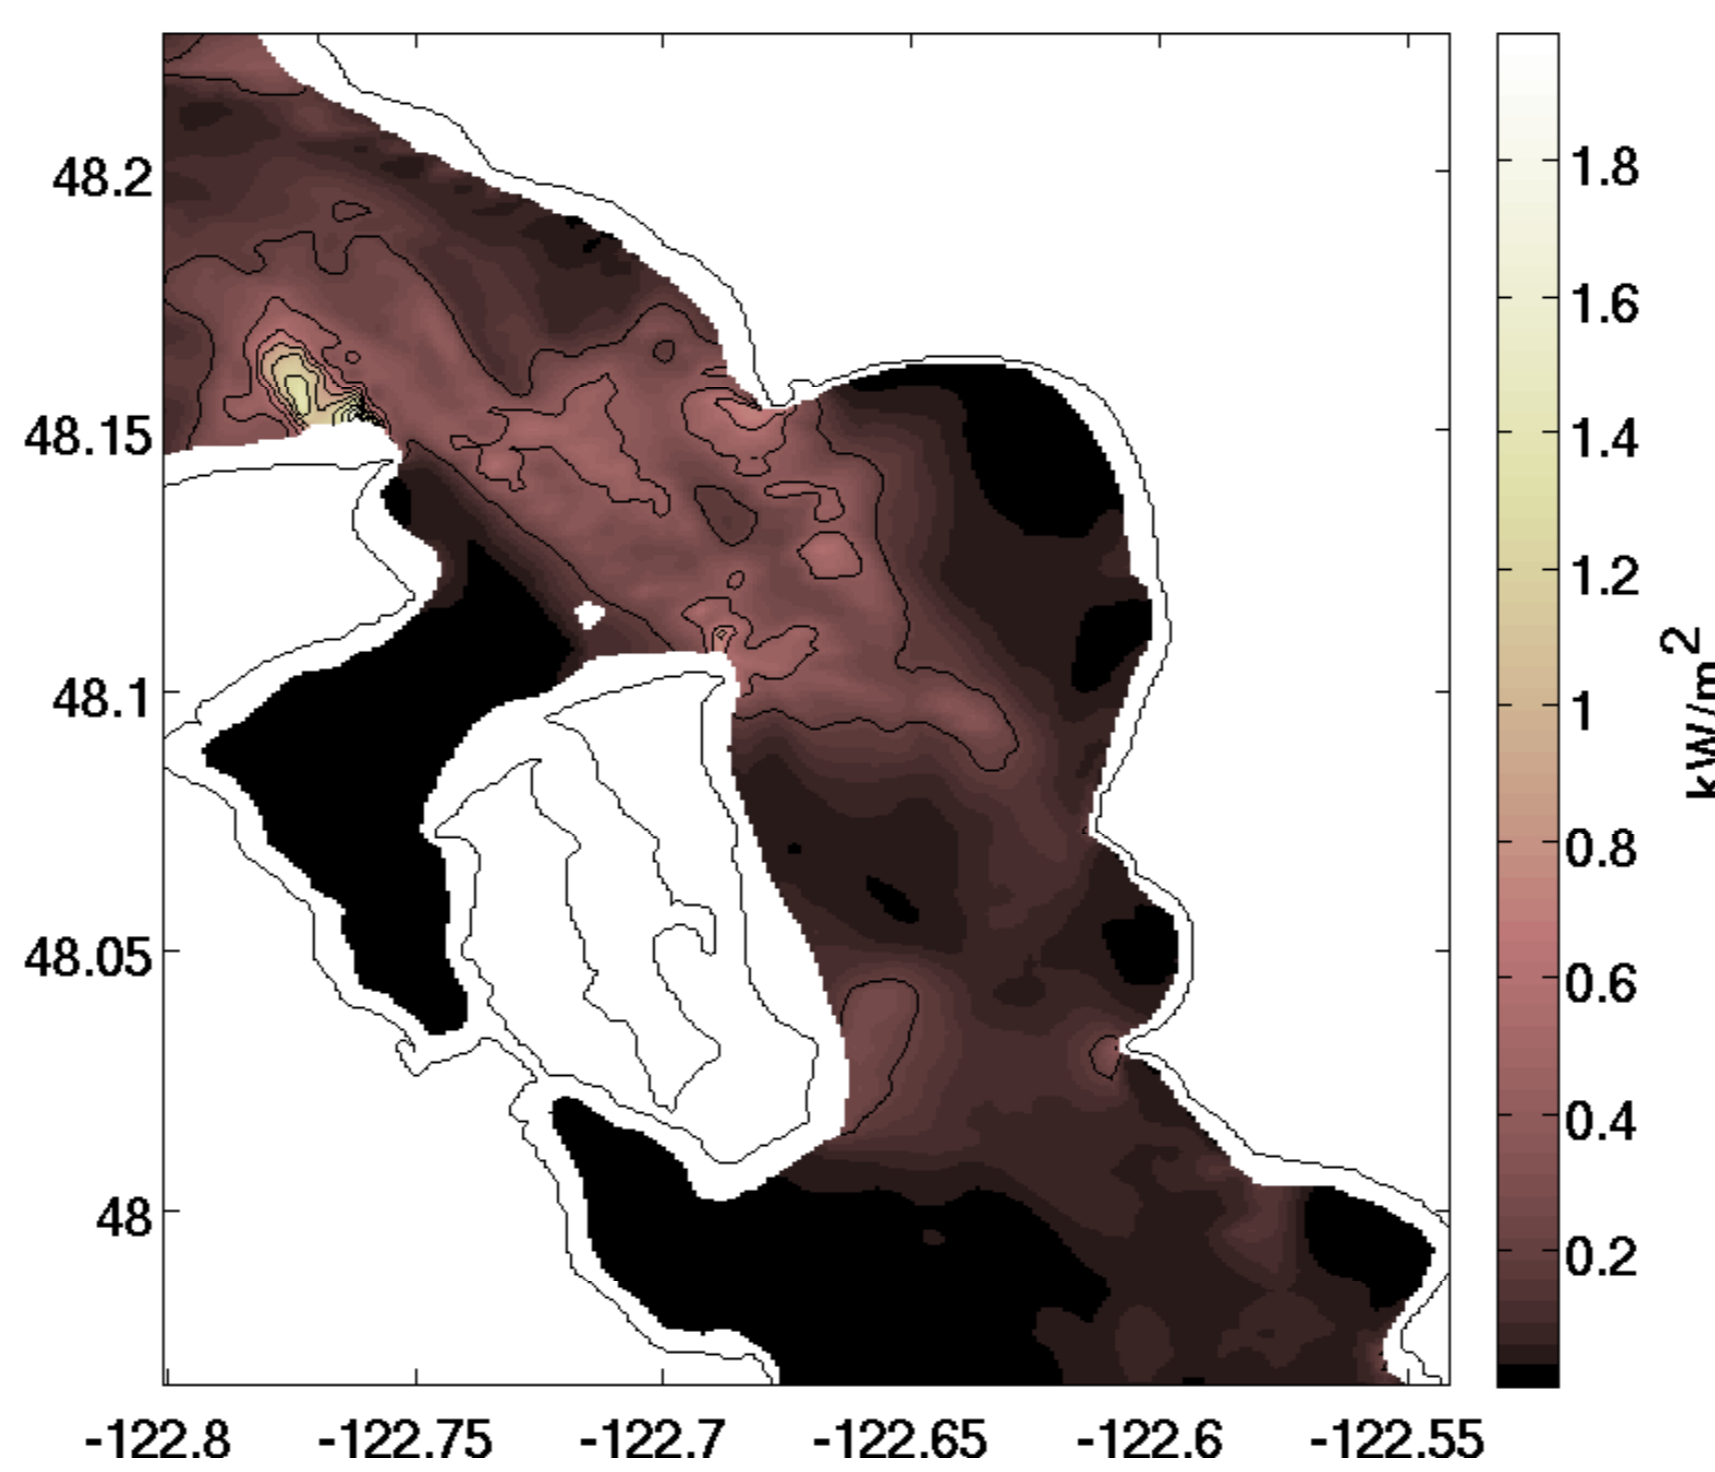


Figure 5: Mean Kinetic Power Density at Hub Height

Tidal Directionality

May matter for fixed-axis turbines that cannot turn with the tidal currents.

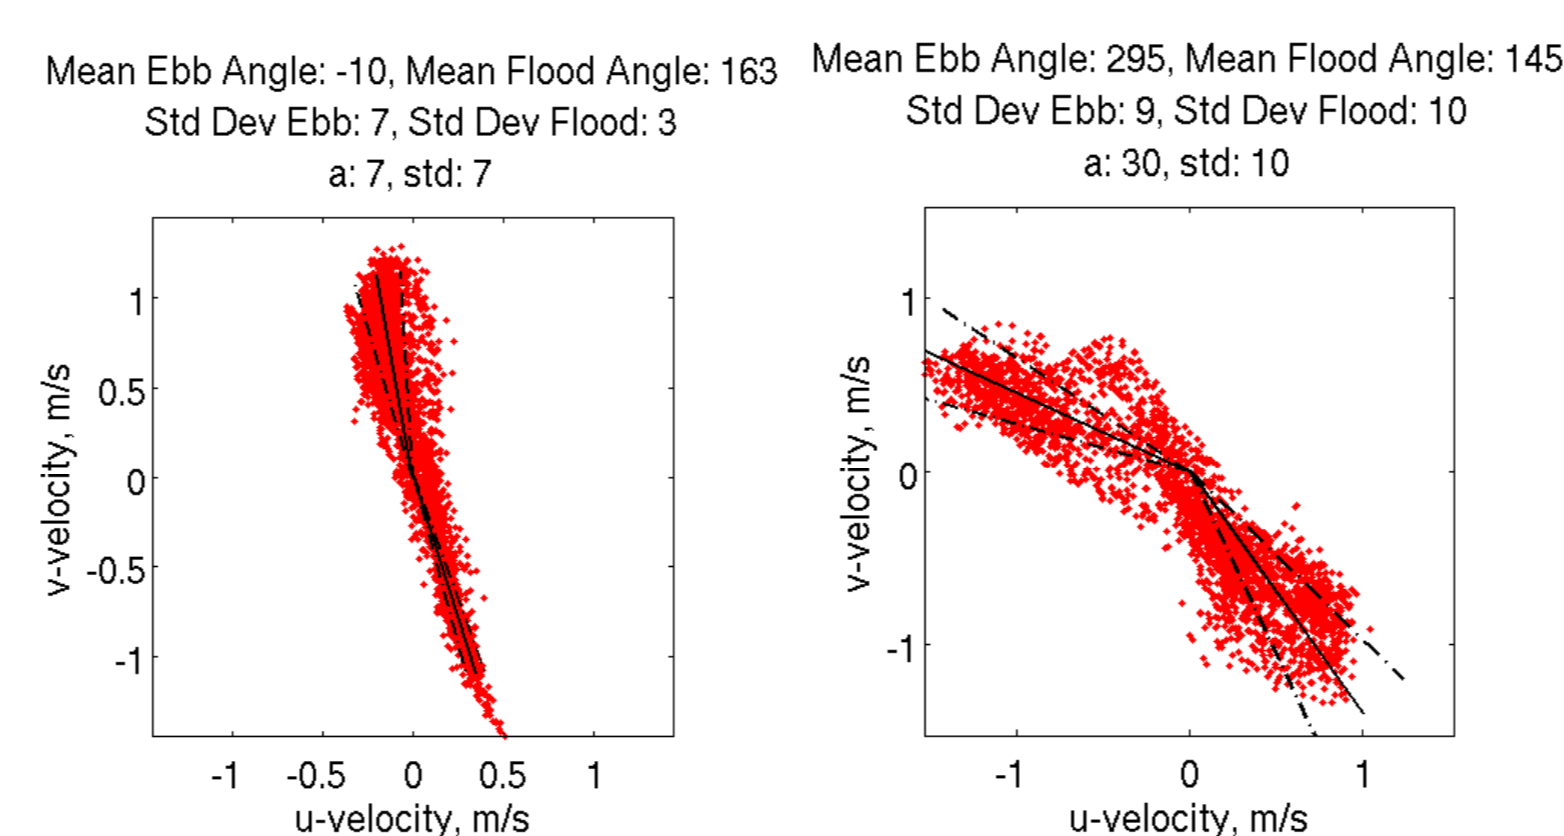


Figure 6: Example Points:
More Bidirectional, Less Directional Deviation on left;
Less Bidirectional, More Directional Deviation on right

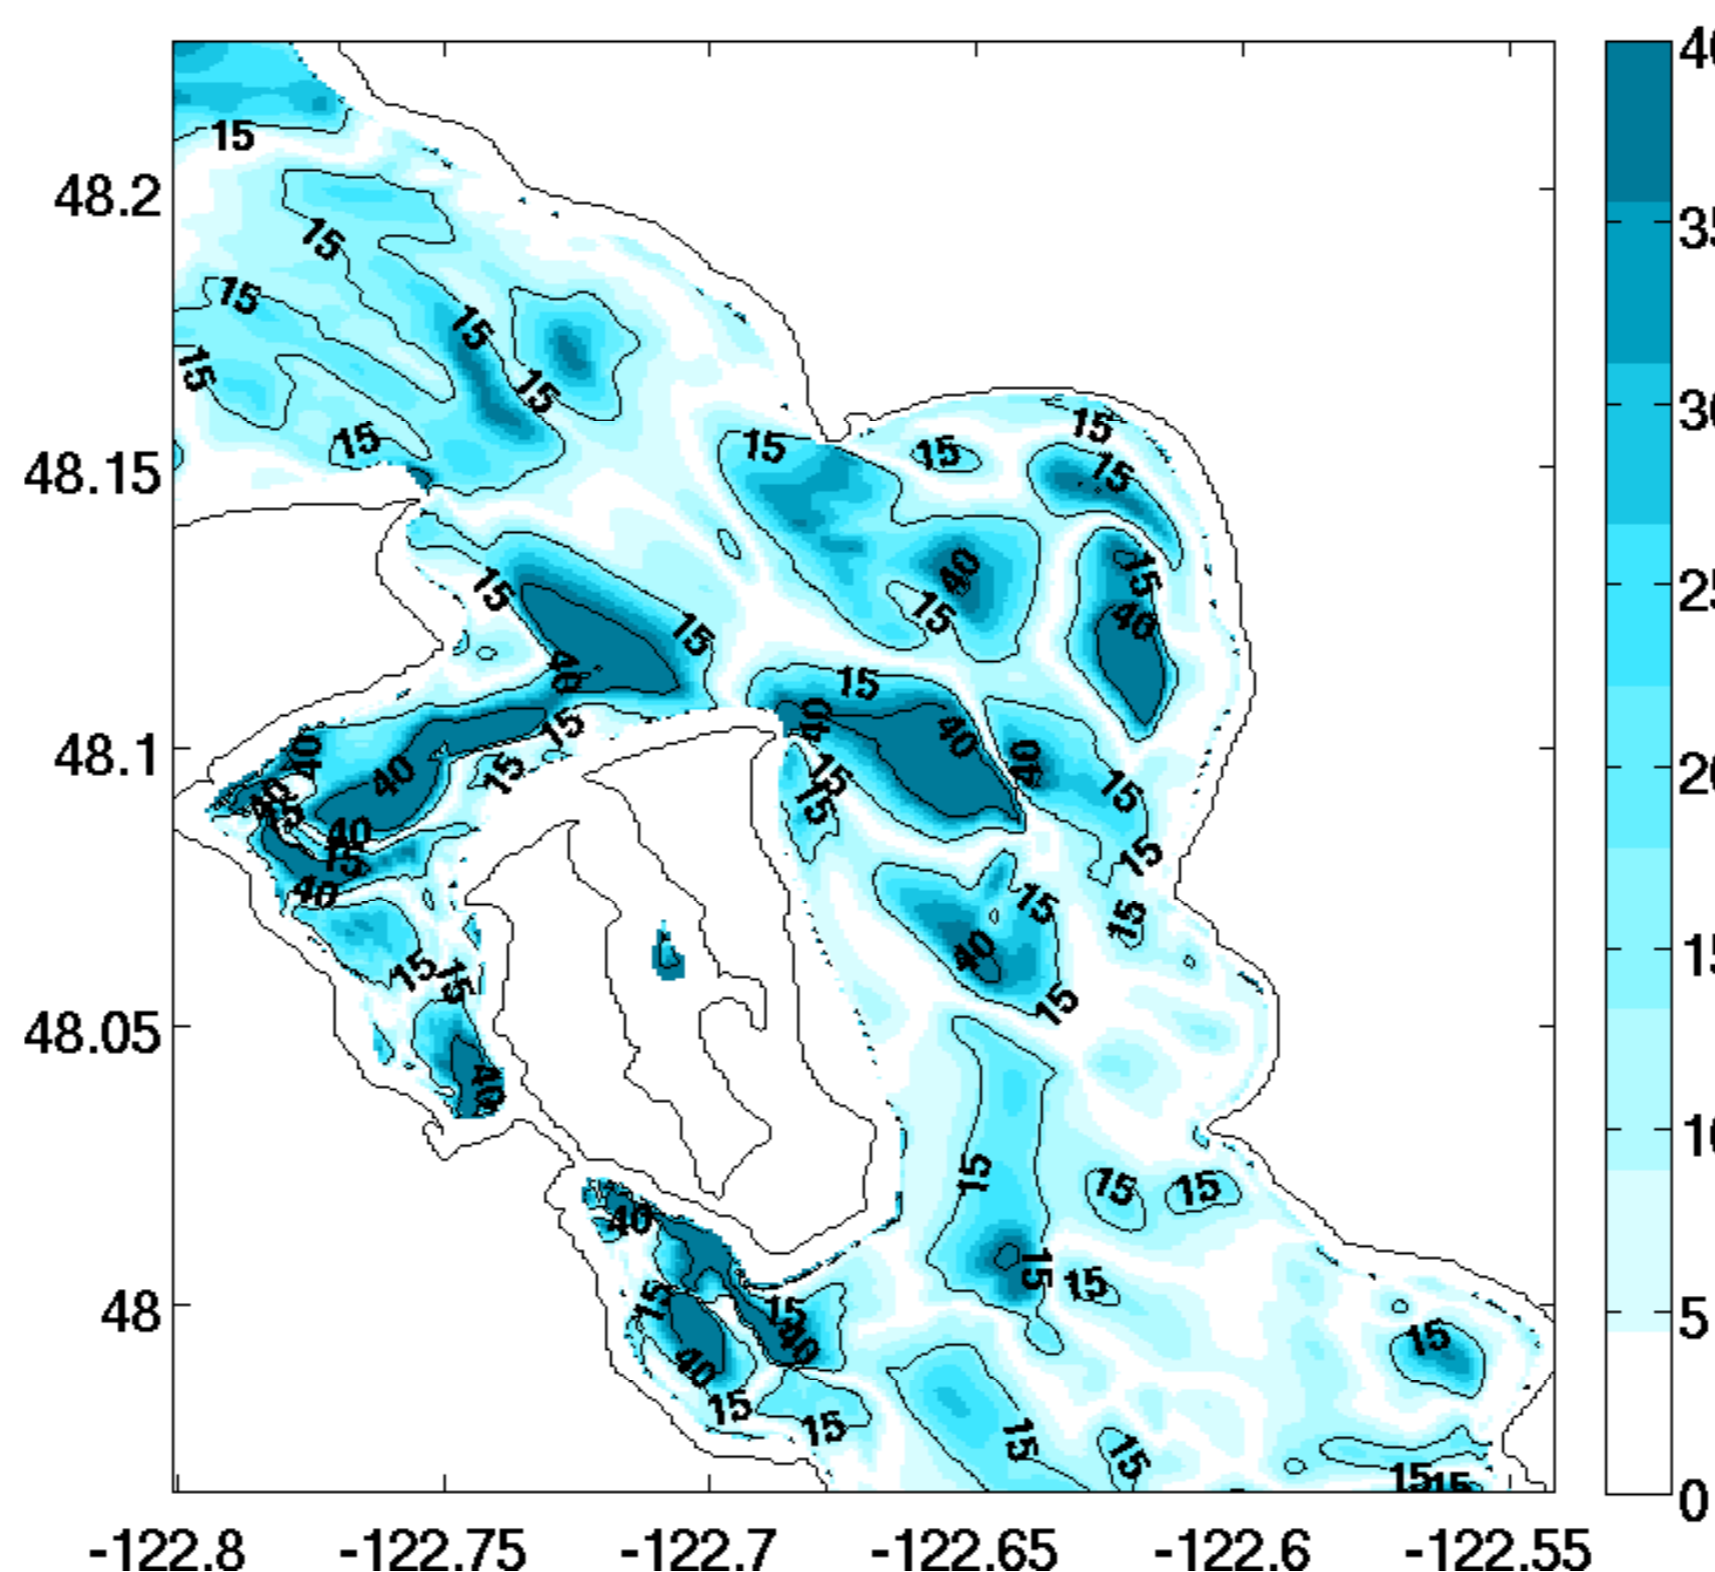


Figure 7: Bidirectionality at Hub Height

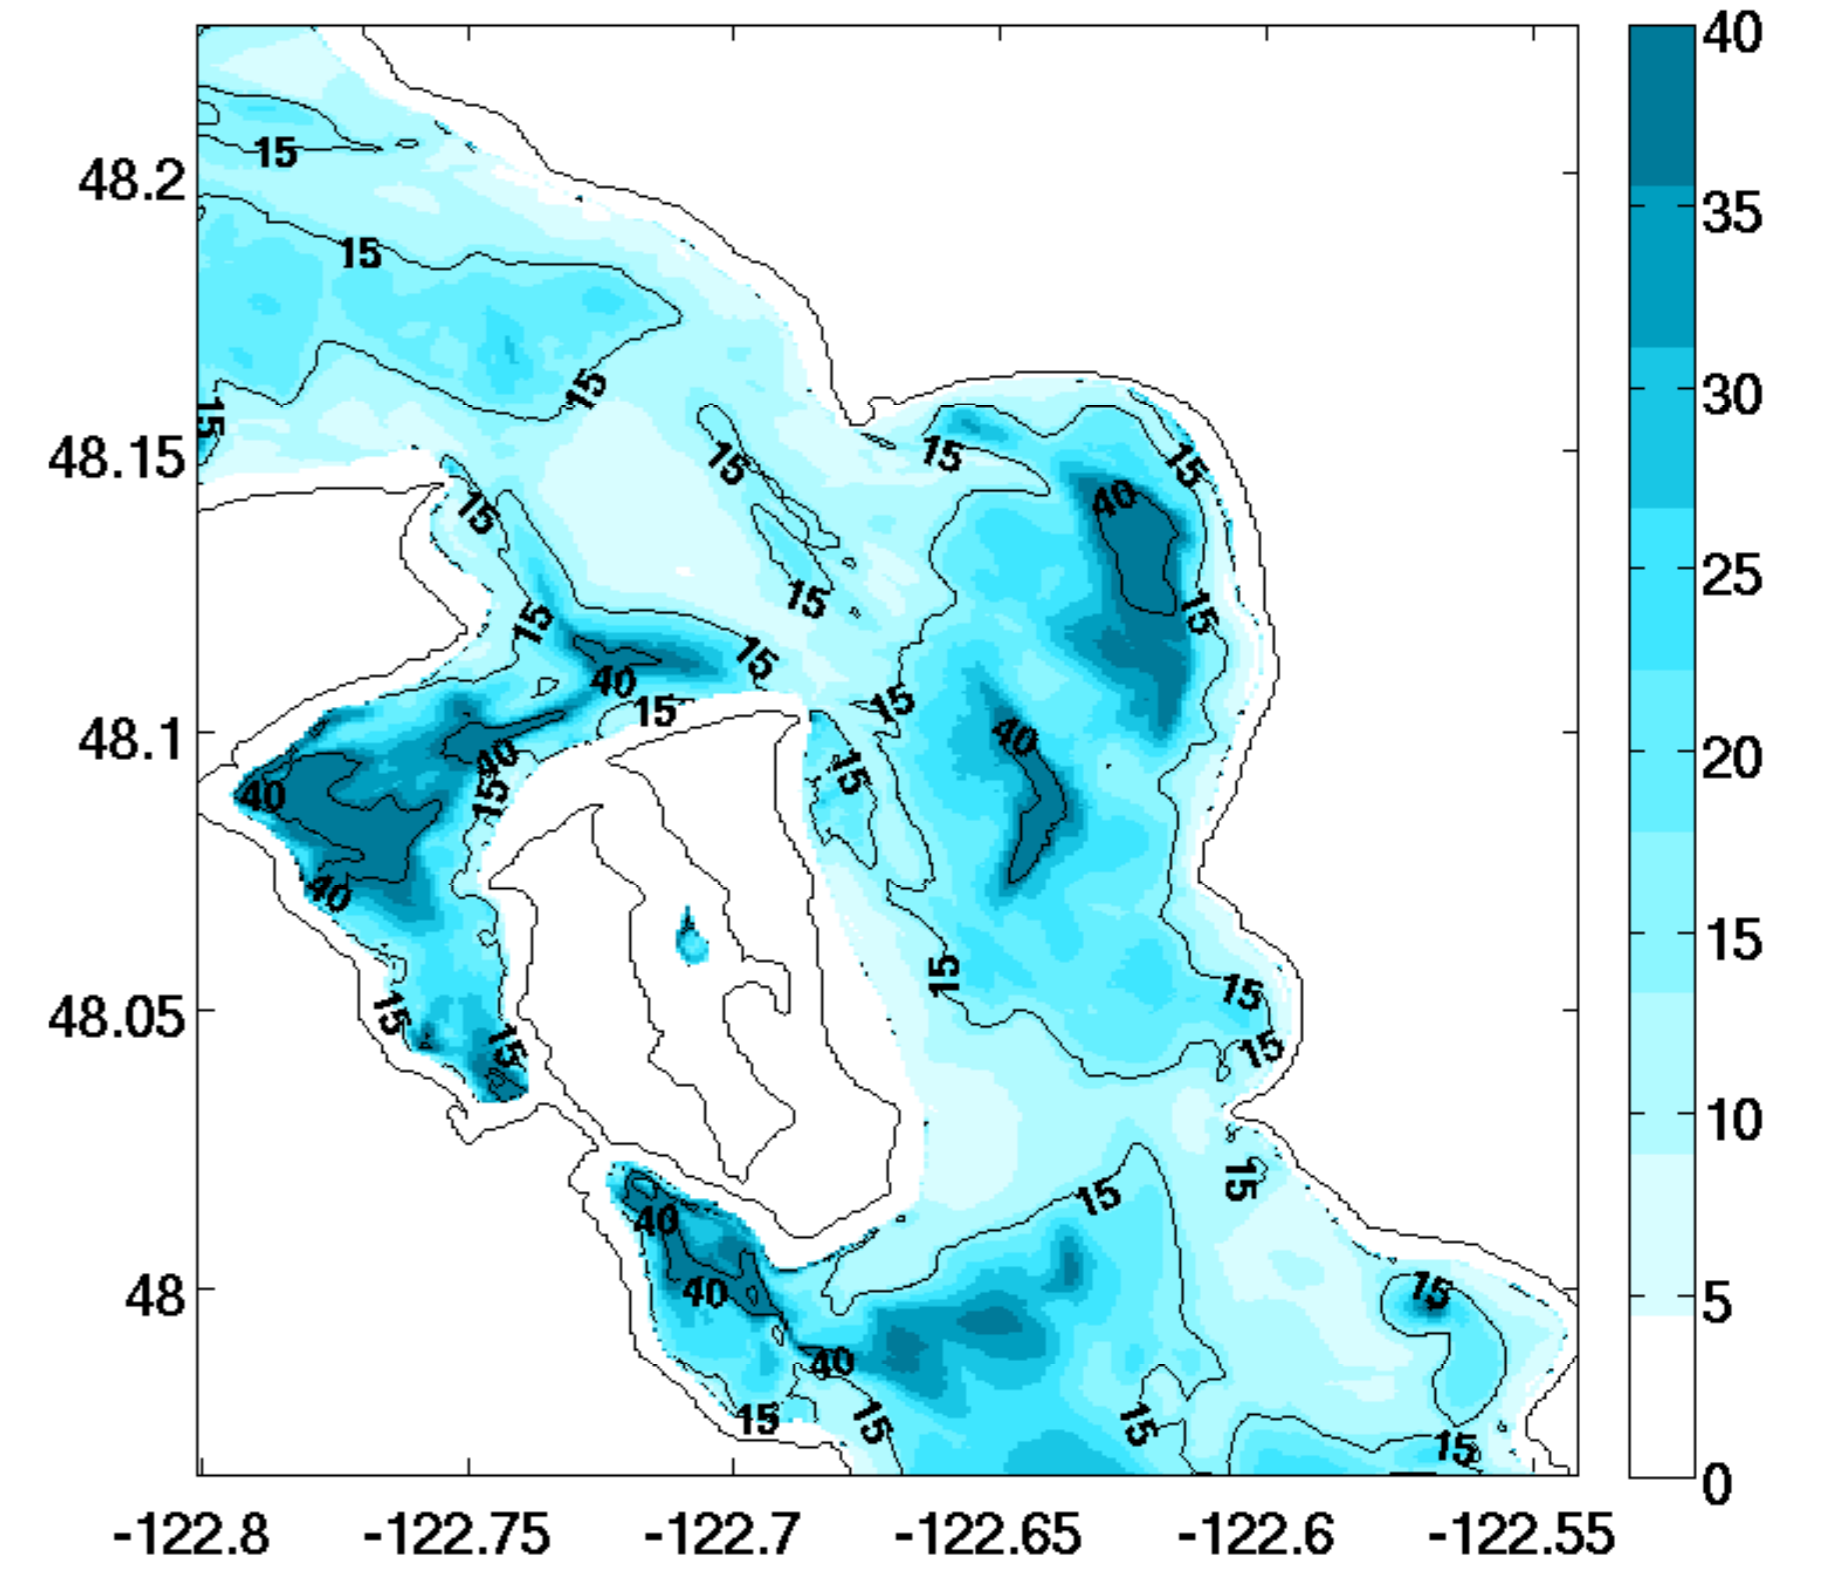


Figure 8: Directional Deviation at Hub Height

Mean Turbulent Kinetic Energy

A measure of small-scale, high energy flow motions that could fatigue turbines prematurely.

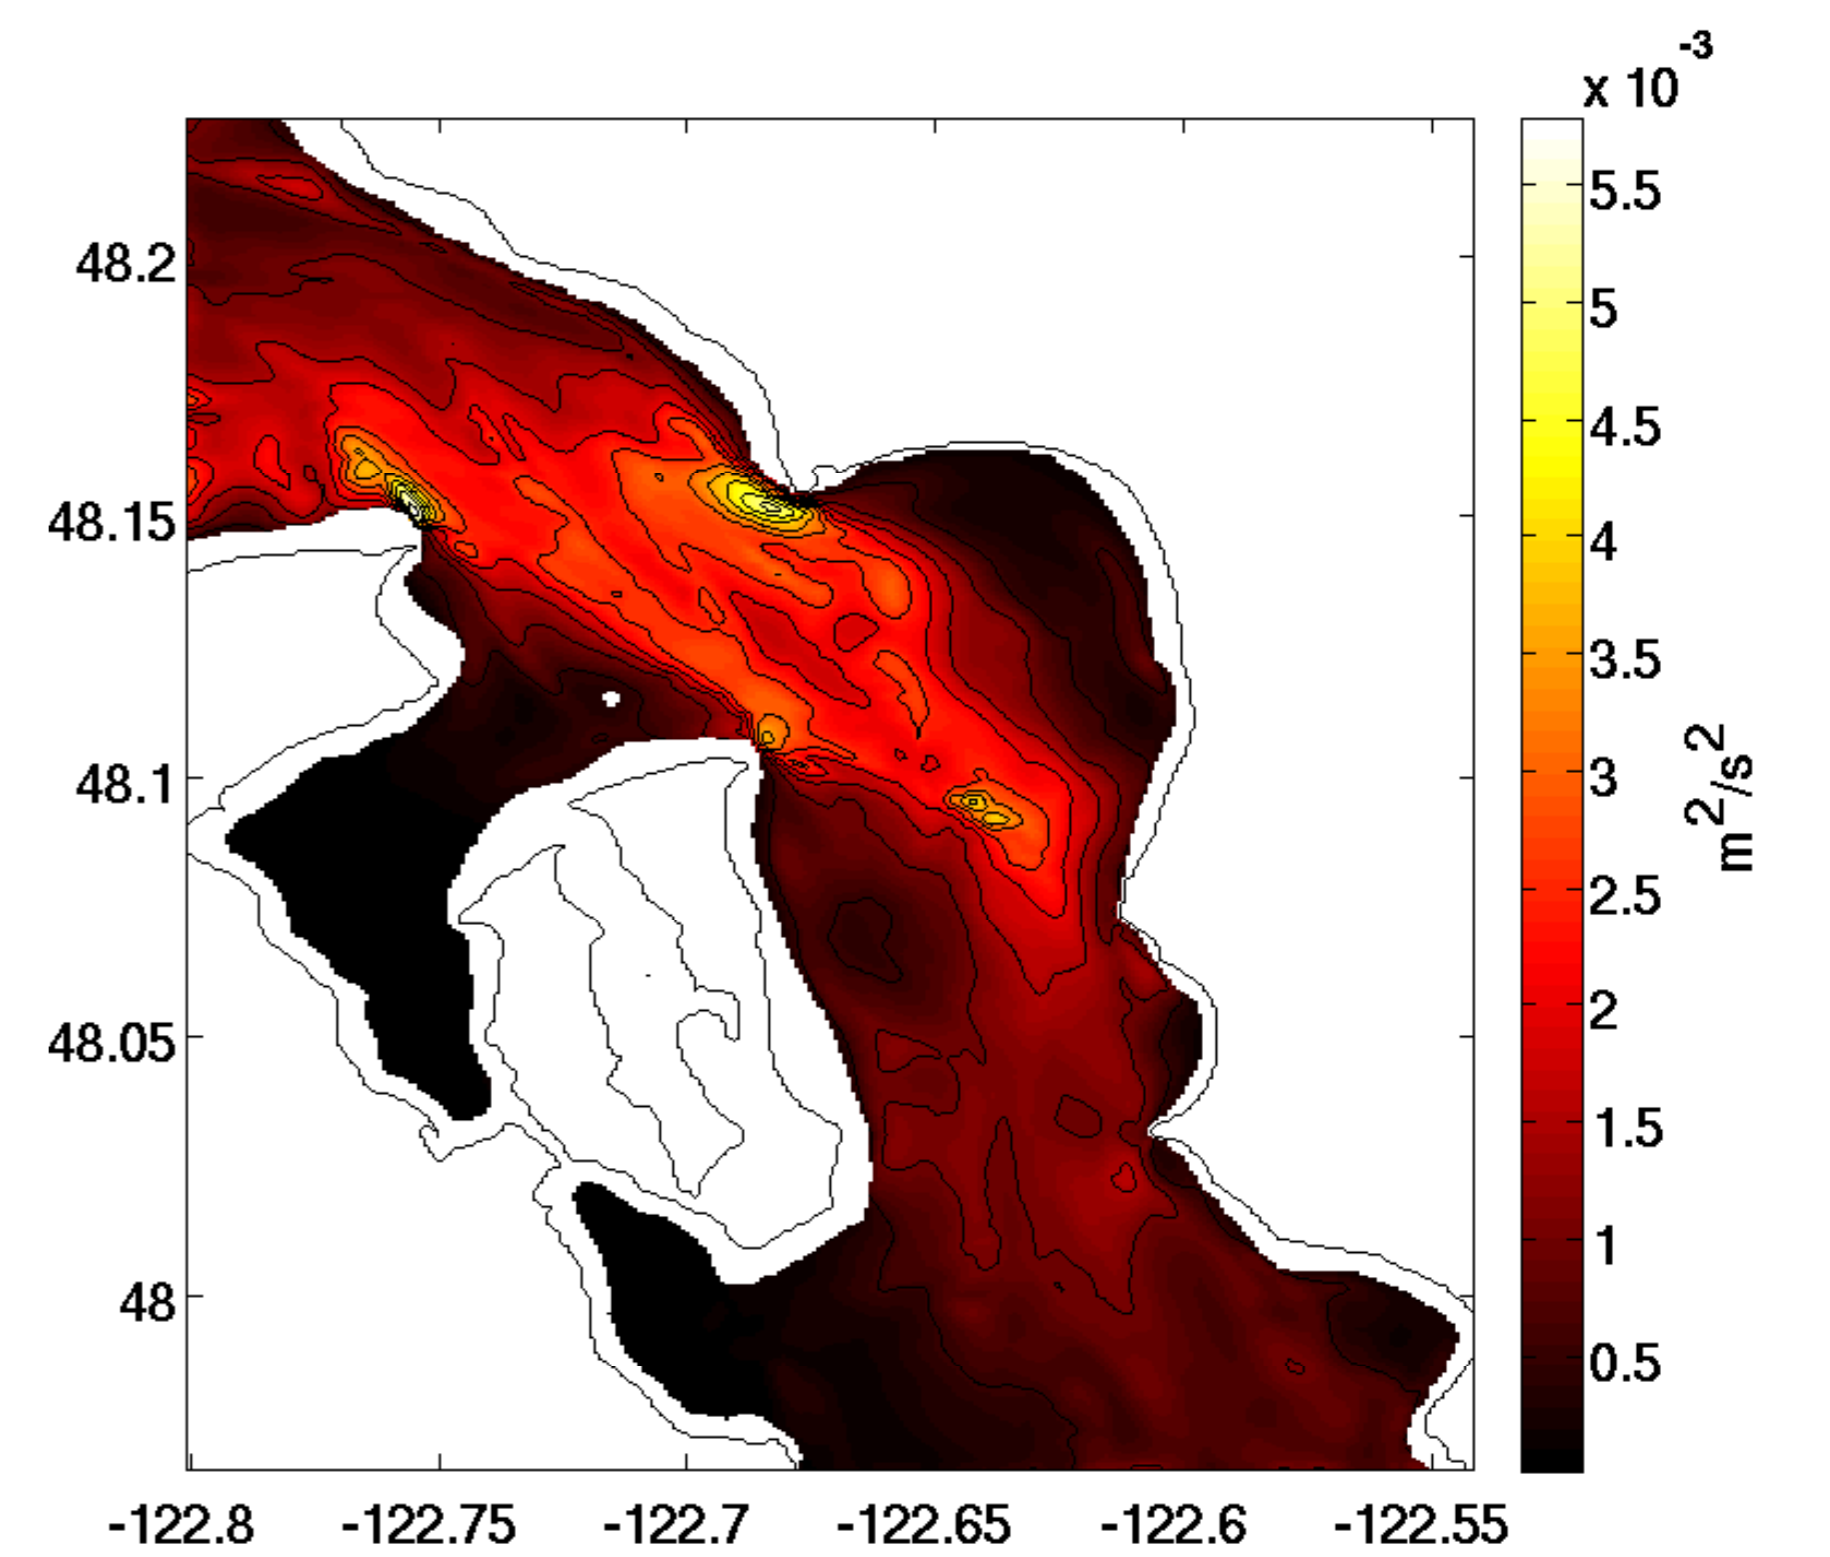


Figure 9: Mean Turbulent Kinetic Energy at Hub Height

Overlaid Metrics for Micrositing

Choose moderate values for each metric, then combine them all to find the resultant "best" turbine siting location.

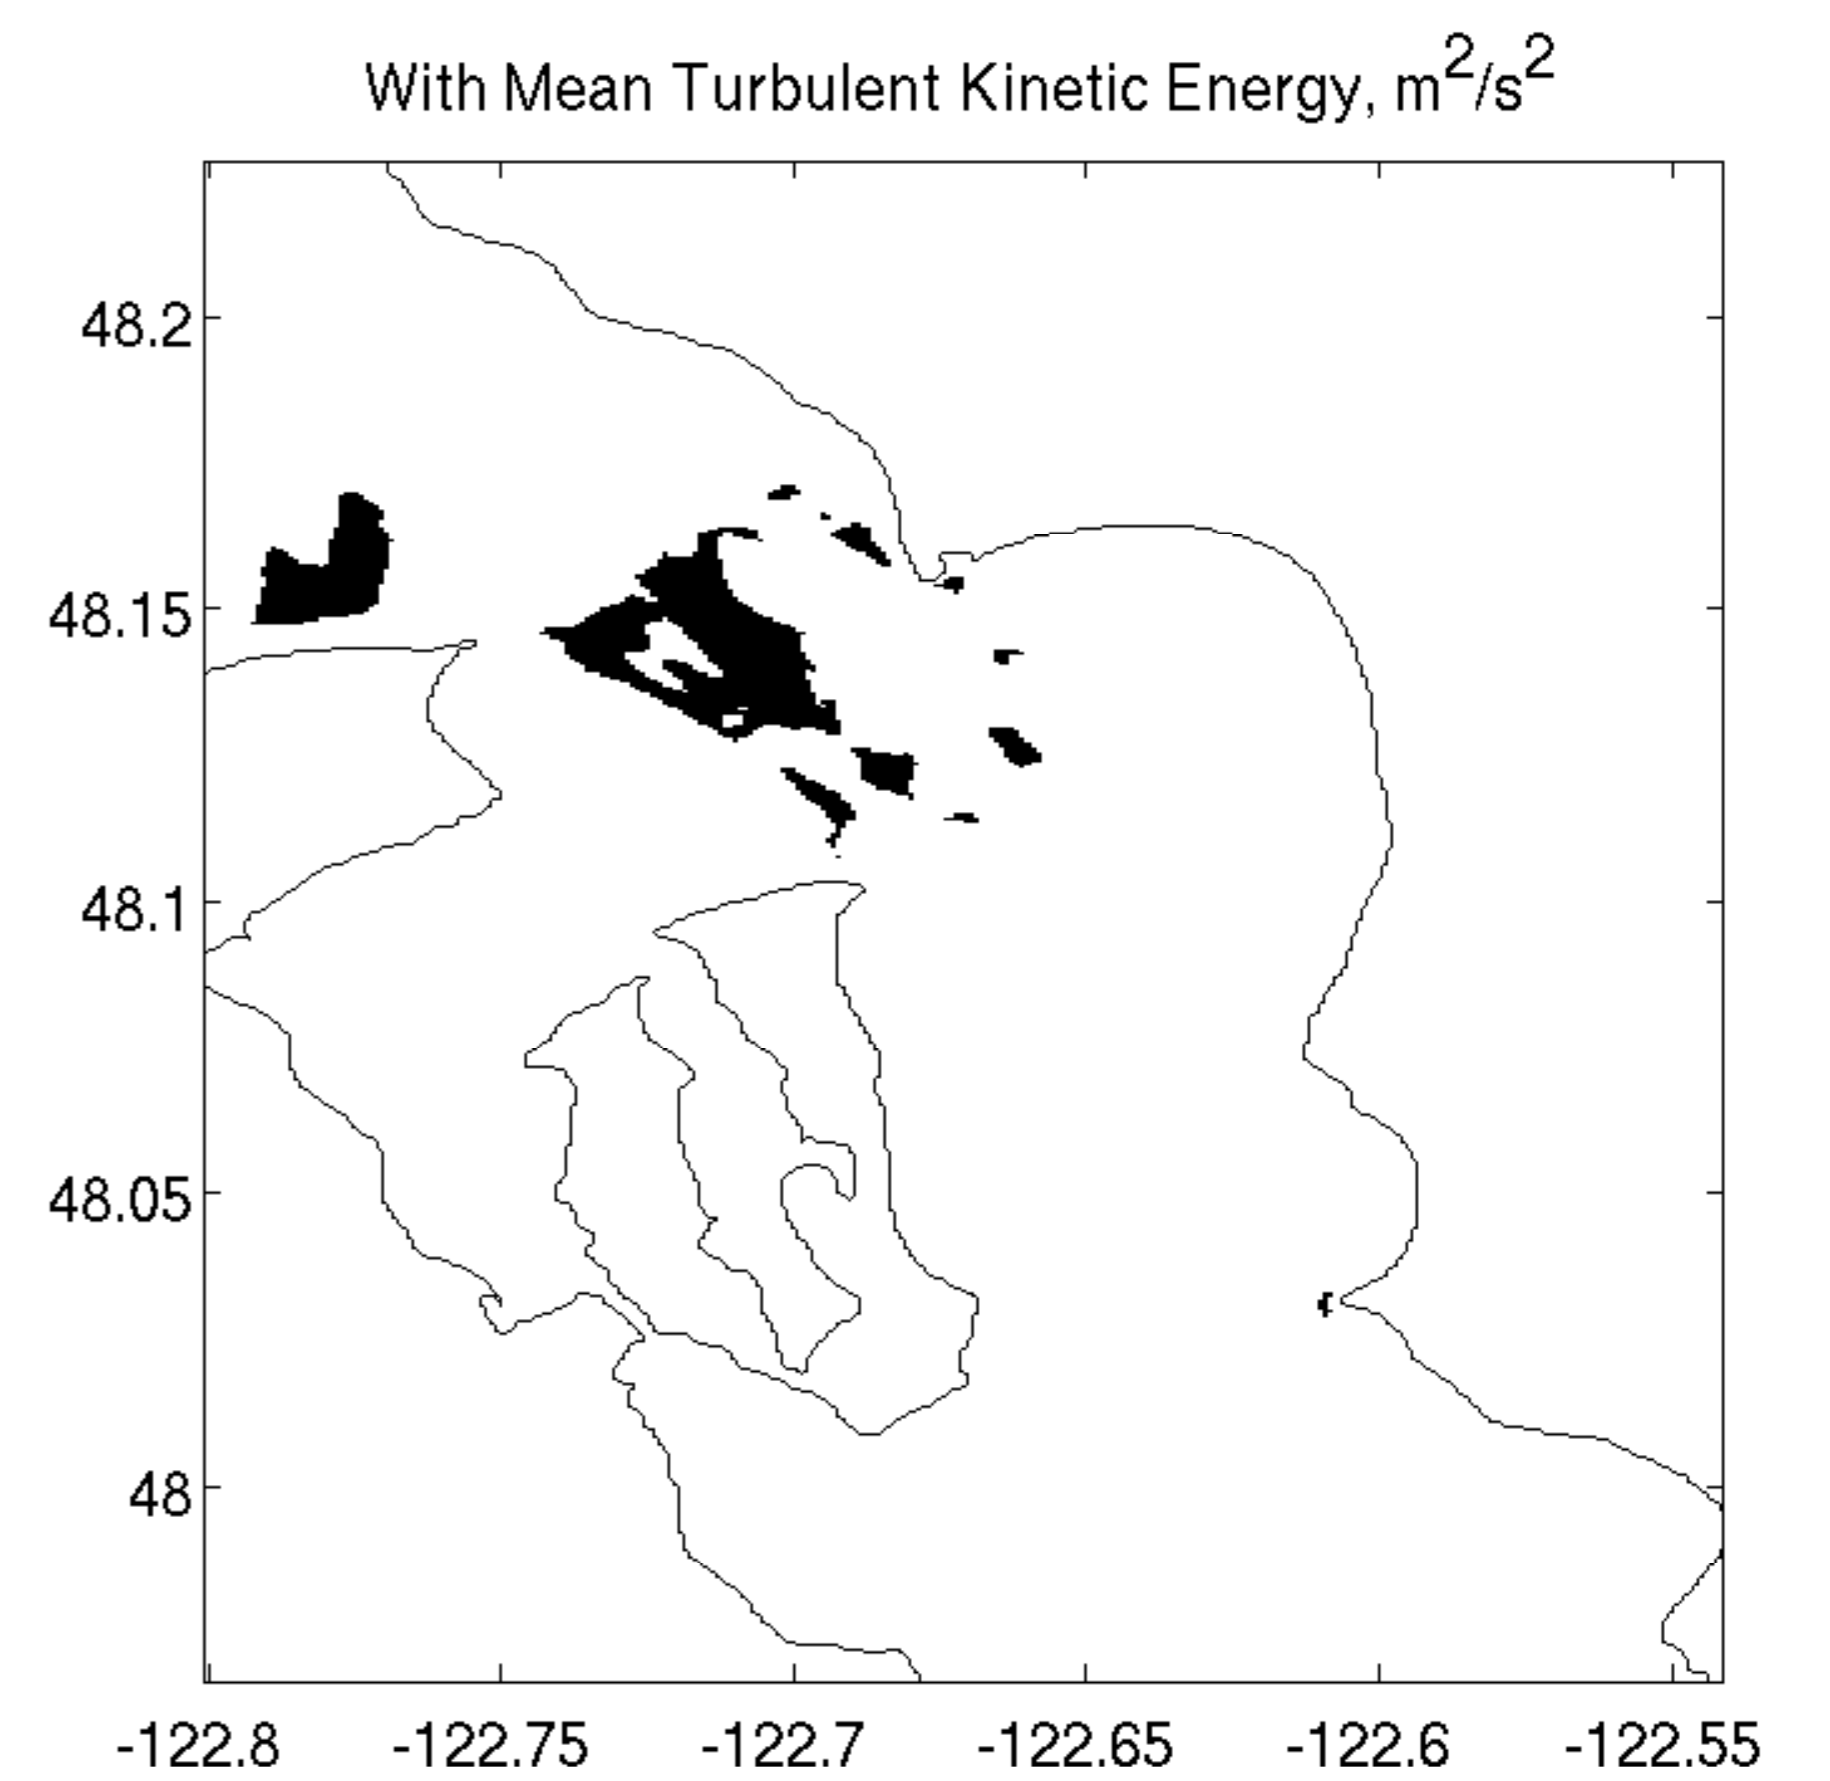


Figure 10: Metrics Combined Together and Overlaid

References

- [1] Open Hydro. <http://www.openhydro.com>, October 2010.
- [2] S. Gooch, J. Thomson, B. Polagye, and D. Meggitt. Site characterization for tidal power.
- [3] B. Polagye. Tidal energy characterization for Admiralty Inlet, Puget Sound, US. *In preparation*, pages 1–15, Aug 2010.